

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
12 February 2004 (12.02.2004)

PCT

(10) International Publication Number
WO 2004/012799 A3

(51) International Patent Classification⁷: **A61M 11/02**,
15/08, B05B 11/00

Birsha [GB/GB]; GlaxoSmithKline, Park Road, Ware,
Hertfordshire SG12 0DP (GB).

(21) International Application Number:
PCT/EP2003/008499

(74) Agent: **THOMPSON, Clive, Beresford**; GlaxoSmithK-
line, Corporate Intellectual Property (CN925.1), 980 Great
West Road, Brentford, Middlesex TW8 9GS (GB).

(22) International Filing Date: 30 July 2003 (30.07.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0217798.8 1 August 2002 (01.08.2002) GB

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC,
SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA,
UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(71) Applicant (*for all designated States except US*): **GLAXO
GROUP LIMITED** [GB/GB]; Glaxo Wellcome House,
Berkeley Avenue, Greenford, Middlesex UB6 0NN (GB).


(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,

(72) Inventor; and

(75) Inventor/Applicant (*for US only*): **DAVIES, Michael**,

[Continued on next page]

(54) Title: A FLUID DISPENSING DEVICE

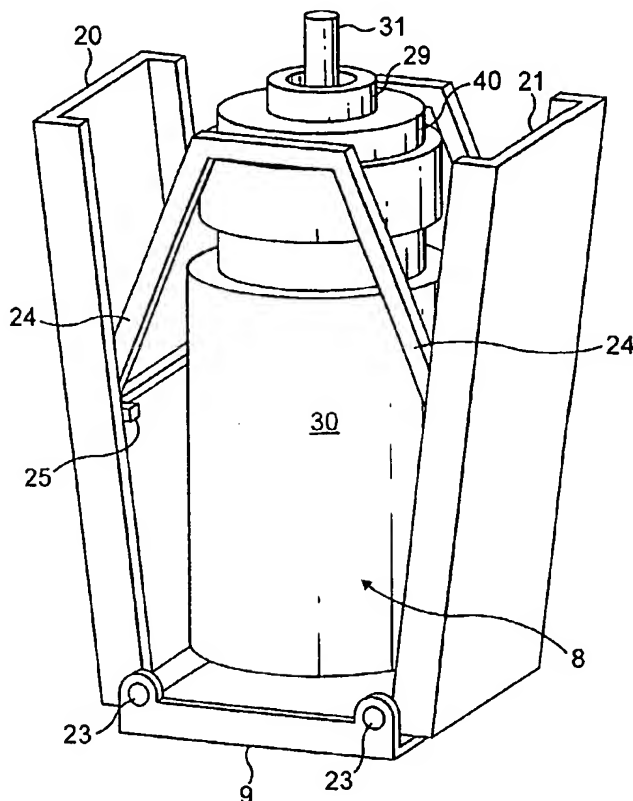

(57) Abstract: There is provided a fluid dispenser (5, 105, 205, 305, 405) having a housing (9, 109, 209, 309, 409) and a pump action fluid discharge device (8, 108, 208, 308, 408). The pump action fluid discharge device (8, 108, 208, 308, 408) is arranged to be actuated by one or more levers (20, 21, 120, 220, 221, 320, 321, 420, 421) which are pivotally supported within the housing (9, 109, 209, 309, 409). When the or each lever (20, 21, 120, 220, 221, 320, 321, 420, 421) is rotated about its lower end the fluid discharge device (8, 108) is urged towards a nozzle (11, 111, 211, 311, 411) causing a single dose of fluid to be dispensed from the nozzle (11, 111, 211, 311, 411). Various mechanisms are proposed for converting the transverse application of force from each lever (20, 21, 120, 220, 221, 320, 321) into a force along a longitudinal axis of the fluid discharge device (8, 108, 208, 308, 408).